DATASHEET

Snap buckle flat 20 softline

patented technology

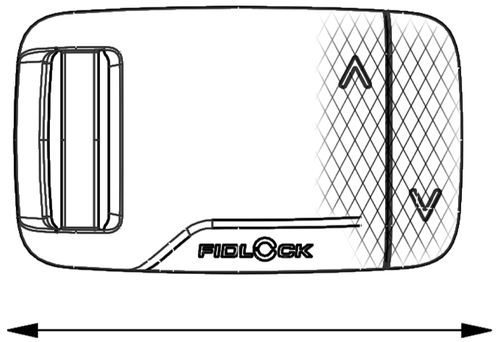

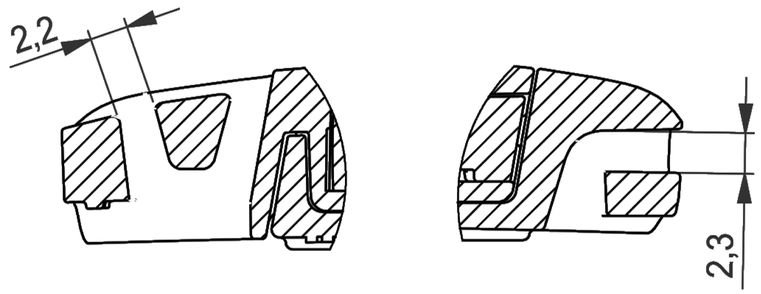

Detail webbing connection
scale: 2:1
max webbing: 2,0 mm
min webbing: over 1.3 mm recommended

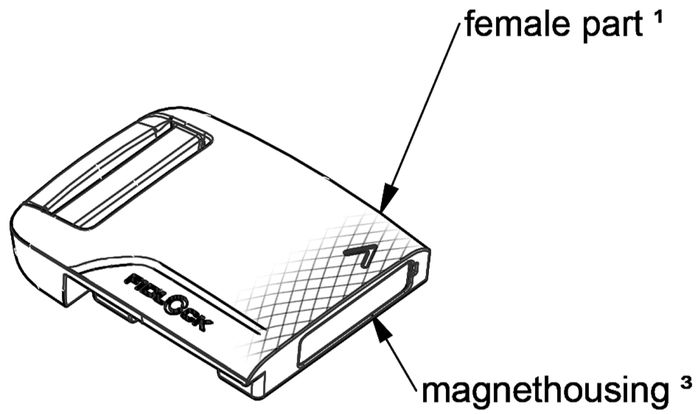

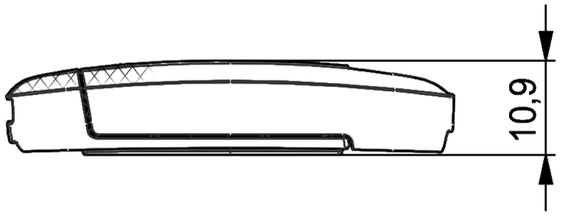

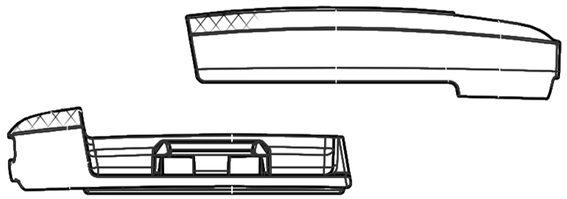

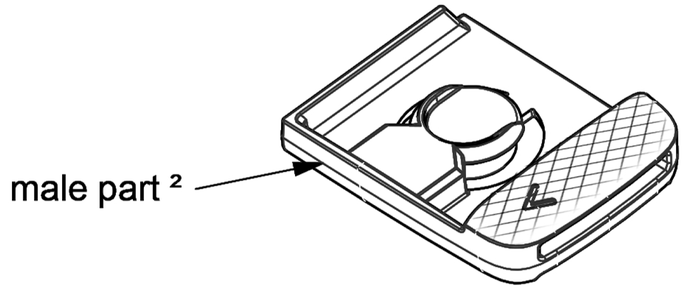

nominal values in millimeters [mm]

OPENING	slide
MATERIAL	PA6 GF ¹ ², PA6³, NdFeB ¹ ², epoxy²
COLOUR	black white speckled
WEIGHT	14,9 g (weighed)
BREAKING LOAD**	220 N

GENERAL NOTES*

Recycled material PA6 GF and PA6:
Not suitable for safety-relevant applications
Not for helmet use!

Coloured options:
Colour may vary, due to raw material.
Minor dark particals may appear, due to raw material

ARTICLE NO.	F8090-000001(BWS)R
PRODUCT	Snap buckle flat 20 softline
SCALE	1:1 DIN A4
REVISION / DATE	R00 10.07.24

* The manufacturer of the end products in which FIDLOCK fasteners are used, bears the responsibility for thoroughly testing that the FIDLOCK products are suitable for the intended applications.
** According to test specification QM-TP-001

Subject to change without notice, errors excepted
Fidlock GmbH | Kirchhorster Straße 39 | 30659 Hannover | Germany