


Stitching area

Proceed like stitching zipper
Use a zipper presser foot and
stitch length 2-3 mm
(For securing the thread we
recommend choosing a position
next to the Fidlock part.
Otherwise stability could be
reduced.)

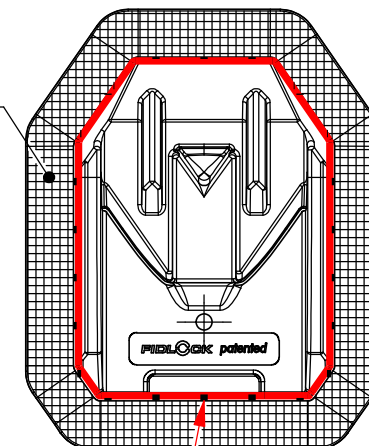

contour for cut out area (underlay)

V-1 1403: black flap
V-1 1203: metal coloured flap

Product	V-Buckle sewable
	female sewable + male 25
Opening	lifting
Material	PA6, PA66-GF30, stainless steel, NdFeB
Colour	black
Weight	26g
Load capacity	60kg
General notes	connection to fabric (strength of yarn, fabric and type of stitching technique) needs to be at least as strong as load capacity, also available without pull tab

Article No	V-11203-000002(BLK) V-11403-000002(BLK)
Scale	1:1
Date	14.04.2021
Author	SO