


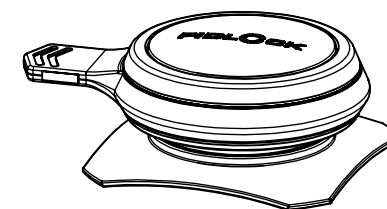
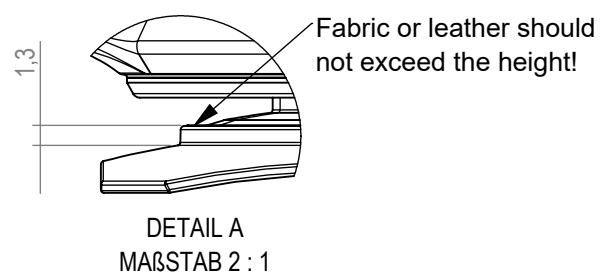
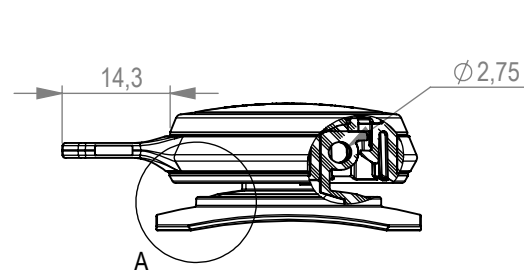


**FIDLOCK®**

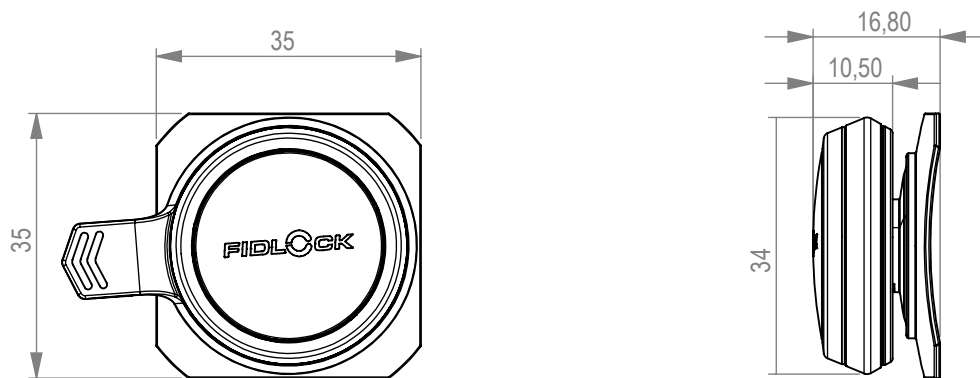

sewing and gluing surface

product	<b>WINCH</b>
opening	Pull
material	PA6, PA6 GF15, ABS, TPU, NbFeB, Epoxy
colour	black
lace/string diameter	1,2 - 2,75 mm
lace/string max. capacity	500 mm
lace/string attachment	overhand knot, figure eight knot
weight	13,5 g
load capacity	200 N
washability	max. 60 degree
general notes	stitchable base, delivery without Lace/String, String braided, polyester fibers, nylon;

Article No	01510
Scale	1:1
Date	18.11.2019
Author	Heiko Büttner

patented technology.